



# FLIR T1K

## HD Thermal imaging camera

Get ready for outstanding thermal infrared performance, built on 50 years of experience. With its remarkable range, up to 3.1 MP in resolution, and customization to fit your needs, the T1K is designed to be the ultimate tool to streamline your workday.

For the sharpest images, the truest temperatures, the most flexibility – the T1K is the ultimate result of five decades of infrared expertise.

### Exceptional measurement performance

*When you need the most accurate temperature measurements, from wide angle to telephoto*

- The FLIR OSX™ Precision HDIR optical system lets you take accurate measurements from 2x as far away
- Continuous autofocus mode keeps pace with your movements
- Advanced OSX optical system ensures accurate measurements in extreme conditions
- Unique optical path eliminates error from heat sources outside the field of view

### Outstanding image clarity


*An extraordinarily sensitive detector, enhanced by the processing power of UltraMax™*

- 1024 x 768 detector offers the best resolution of any FLIR hand-held camera
- Exceptional thermal sensitivity of < 0.02°C at +30°C, 2x better than the industry standard
- UltraMax™ super-resolution quadruples the pixel count up to 3.1 MP, for finer detail and accuracy
- MSX® embosses visual details on the thermal image


### Features and user interface designed for the expert

*Compact design, responsive user interface, and instant report generation make your workday easier and more productive*


- Programmable buttons allow you to configure the camera to fit your work flow
- Dynamic focus control adjusts to your touch so you can dial in images perfectly
- Radiometric recording captures full resolution, full-frame video for comprehensive analysis
- One-click Rapid Report™ generation lets you share images and findings fast

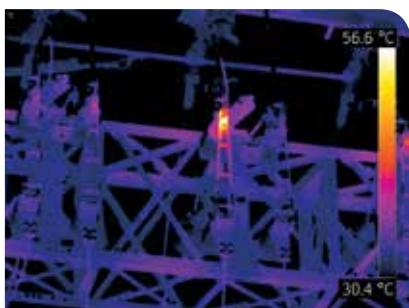

Overheating substation circuit breaker

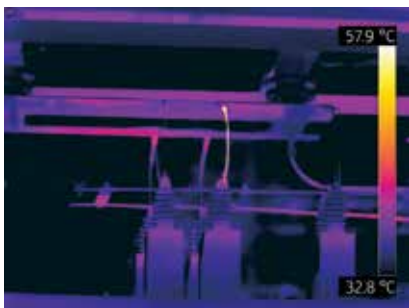

Hot power line transformer

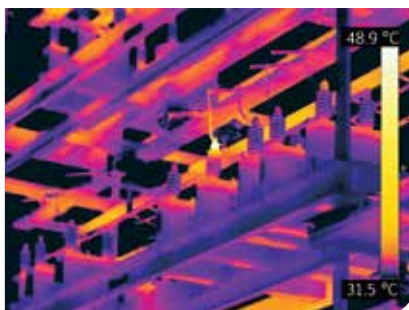

Failing transformer coil against a cold sky

VÓRTEX Equipamentos ~ Fone (31) 3427-7700 ~ [vortex@vortex.com.br](mailto:vortex@vortex.com.br)



The World's Sixth Sense™

## Specifications

Model numbers		FLIR T1020	
<b>Imaging and optical data</b>			
IR sensor	1024 × 768 (786,432 measurement pixels)		
Thermal sensitivity/NETD	< 0.02°C at +30°C		
Lens choices	12°, 28°, 45°, 3x Close-up		
Minimum focus distance	0.2m (0.66 ft.) to 0.8m (2.13 ft.), depending upon the lens		
Image frequency	30 Hz		
Spectral range	7.5 - 14 μm		
4.3" display	800 x 480 pixels		
Auto orientation	Yes		
Touch screen	Yes		
<b>Image presentation modes</b>			
Thermal image	Yes		
Visual image	Yes		
UltraMax™	Unique super-resolution process quadruples pixel count, up to 3.1 MP		
MSX®	Embosses visual details on full resolution thermal image, for clear text and location identification		
Gallery	Yes		
<b>Measurement</b>			
Accuracy	±2°C (±3.6°F) or 2%, whichever is greater, at 25°C (77°F) nominal		
<b>Measurement analysis</b>			
Measurement tools	10 spotmeters, 5+5 areas (boxes, circles) with min./max./average		
Emissivity correction	Variable from 0.01 to 1.0 or selected from materials list		
Measurements correction	Emissivity, reflected temperature, relative humidity, atmospheric temperature, object distance, external IR window compensation		
Color palettes	Iron, Rainbow, Rainbow HC, White Hot, Black Hot, Arctic, Lava		
<b>Storage of media</b>			
Storage media	Removable SD card (Class 10)		
Image file format	Standard JPEG, including digital photo and measurement data		
<b>Video recording/streaming</b>			
Radiometric IR-video recording	Real-time radiometric recording to SD card		
Non-Radiometric IR-video recording	H.264 to SD card		
Radiometric IR-video streaming	Real-time radiometric streaming via USB		
Non-Radiometric IR-video streaming	H.264 video using Wi-Fi or USB		
<b>Digital camera</b>			
Digital camera	FOV adapts to the IR lens		
Video lamp	Built-in LED light		
<b>Additional information</b>			
USB, connector type	USB Micro-AB Data transfer to and from PC/Uncompressed colorized video		
Battery	Rechargeable Li-ion polymer battery		
Battery operating time	> 2.5 hours at 25°C (+68°F)		
Charging system	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger		
Charging time	2.5 hours to 90% capacity		
External power operation	AC adapter, 90-260 VAC input, 50/60 Hz or 12 V output from a vehicle (cable with standard plug, optional)		
Power management	Automatic power-off functionality, user-configurable		
Storage temp. range	-40°C to +70°C (-40°F to 158°F)		
Weight	1.9 kg (4.3 lb.) to 2.1 kg (4.6 lb.), depending upon lens model		
Tripod mounting	UNC ¼"-20		
<b>System includes:</b>			
Infrared camera with lens	Hard transport case	Power supply, including multi-plugs	User documentation on CD-ROM
Battery (2 each)	Large eyecup	USB cable, Standard A to Micro-B	Printed documentation
Battery charger	Lens cap	Calibration certificate	Bluetooth headset
HDMI-HDMI cable	Neck strap	FLIR Tools+ license card	SD card



\*after product registration on [www.flir.com](http://www.flir.com)

Covers the camera for 2 years, the battery for 5 years, and detector for 10 years

### NASHUA

FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 03063  
USA  
PH: +1 603.324.7600

### PORTLAND

Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 503.498.3547

### EUROPE

FLIR Systems  
Luxemburgstraat 2  
2321 Meer, Belgium  
PH : +32 (0) 3665 5100

### CHINA SHANGHAI

FLIR Systems Co.,Ltd.  
K301-302, No 26 Lane  
168, Daduhe Road,  
Putuo District, Shanghai  
200062, P.R.China  
PH: +86 21 5169 7628

[www.flir.com](http://www.flir.com)  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. B/2015 IND\_025\_EN

VÓRTEX Equipamentos ~ Fone (31) 3427-7700 ~ [vortex@vortex.com.br](mailto:vortex@vortex.com.br)

[www.flir.com/T1K](http://www.flir.com/T1K)



The World's Sixth Sense™